


# SMD 32.768kHz Crystal Units

7R Series SMD 32.768kHz Crystal Units

32.768kHz

Size: 2.0×1.2×0.6 mm

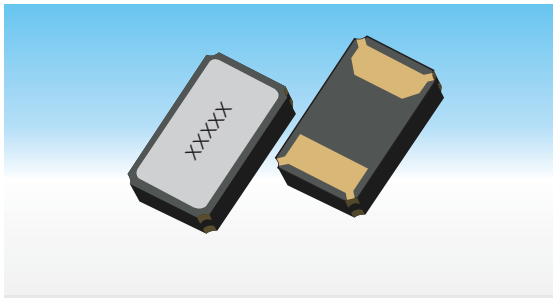

## Features

- 2012 size Ultra miniature and lightweight SMD tuning fork crystal units with low profile of 0.6mm
- A ceramic package with metal lid providing high precision and reliability
- Excellent heat resistance and environmental characteristics
- Application for mobile communications, Consumer device, IoT, Smart card, Wave clock, Wireless communications, etc.
- RoHS Compliant /Pb Free




## Standard Specifications


Item	Type	7R Series SMD 32.768kHz Crystal Units
Frequency Range		32.768 kHz
Load Capacitance		7pF, 9pF, 12.5pF, or specify
Drive Level		0.5μW max.
Frequency Tolerance		±20ppm, or specify
Series Resistance		90KΩ max.
Turnover Temperature		±25°C±5°C
Parabolic Coefficient		$(-0.03±0.01)×10^{-6}/^{\circ}\text{C}^2$ max.
Operating Temperature Range		-20~+70C, -40~+85°C, -55~+85°C . -40~+105°C . -55~+125°C or specify
Storage Temperature Range		-55~+125°C
Shunt Capacitance		1.3pF Typ.
Size (L×W×H) (mm)		2.0×1.2×0.60
Packing Unit		3000pcs./reel

[mm]


### Dimensions

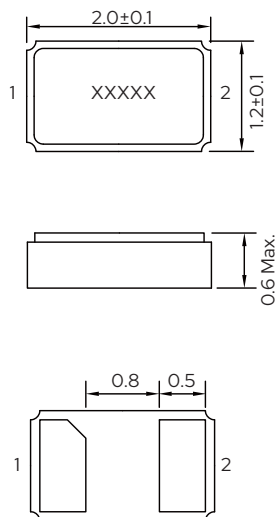

### Connection



### Suggested Layout



Top View Suggested Layout