


VCXOs / Voltage Controlled Crystal Oscillators

5P Series SMD 5032 LV-PECL VCXOs

10~2100MHz

O: LV-PECL

Size: 5.0×3.2×1.2 mm

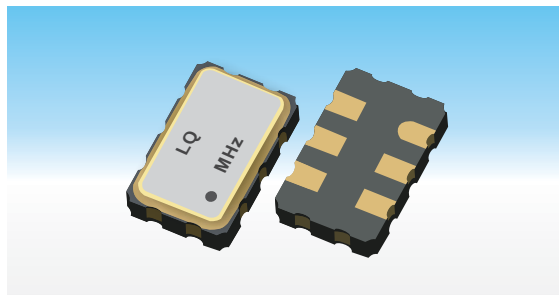

Actual size

Features


- SMD 5032 LVDS high frequency VCXOs
- 3-state function
- Operating voltage: 2.5V / 3.3V
- High frequency range: 10MHz~2100MHz
- Low current consumption
- Low phase noise and jitter
- Application for set-top boxes, SONET /ATM, FPGAs, Fibre Channel, Wireless repeaters, Transponders, HDTV, etc
- RoHS Compliant /Pb Free



Standard Specifications

Item	Type	5P Series SMD 5032 LV-PECL VCXOs	
Output Type		LV-PECL	
Load condition		50Ω to Vcc-2V	
Frequency Range		10MHz~2100MHz	
Supply Voltage		2.5V	3.3V
Frequency Control Voltage		1.25V±1.25V	1.65V±1.65V
Frequency Stability (All Condition)		±25ppm, ±50ppm, ±100ppm, or specify	
Frequency Adjustment Range		±80ppm min., or specify	
Current Consumption		120mA max.	
Stand-by Current		30μA max.	
Symmetry		45~55%	
0 Level Output Voltage (V _{OL})		Vcc-1.85V~Vcc-1.6V	
1 Level Output Voltage (V _{OH})		Vcc-1.03V~Vcc-0.6V	
Rise Time / Fall Time		0.5ns max.	
OE Pin 0 Level Input Voltage (V _{IL})		0.3Vcc max.	
OE Pin 1 Level Input Voltage (V _{IH})		0.7Vcc min.	
Phase Jitter (12KHz~20MHz)		1.6ps max.	
Start-up Time		10ms max.	
Linearity		10% max.	
Input Impedance		5MΩ min.	
Operating Temperature Range		-20~+70C, -40~+85°C, -55~+85°C . -40~+105°C . -55~+125°C or specify	
Storage Temperature Range		-55~+125°C	
Packing unit		1000 pcs/reel	

Dimensions

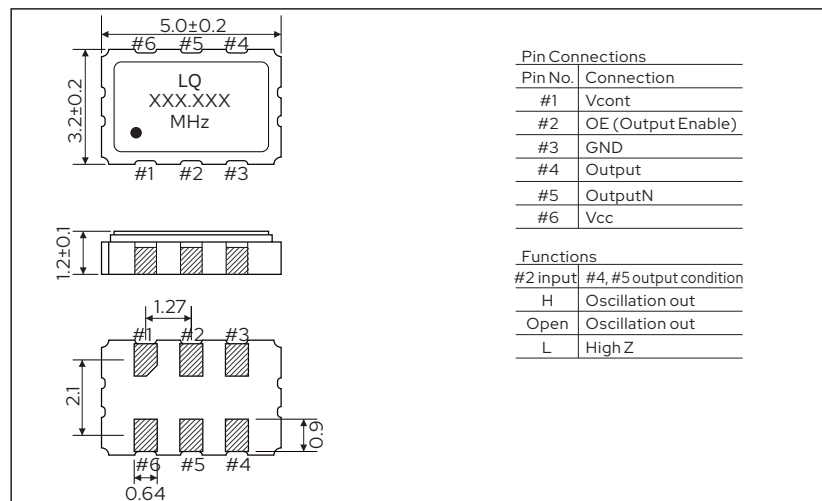

Recommended Land Pattern [mm]

